



US010779481B2

(12) **United States Patent**
Spreen et al.

(10) **Patent No.:** **US 10,779,481 B2**

(45) **Date of Patent:** **Sep. 22, 2020**

(54) **TREE CABLING SYSTEM FOR ROOF DECKS**

(71) Applicant: **The Shredded Tire, Inc.**, Fort Lauderdale, FL (US)

(72) Inventors: **Richard P. Spreen**, Fort Lauderdale, FL (US); **Stephen W. Warter**, Delray Beach, FL (US)

(73) Assignee: **The Shredded Tire, Inc.**, Fort Lauderdale, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 233 days.

(21) Appl. No.: **15/997,086**

(22) Filed: **Jun. 4, 2018**

(65) **Prior Publication Data**

US 2018/0343811 A1 Dec. 6, 2018

Related U.S. Application Data

(60) Provisional application No. 62/514,798, filed on Jun. 3, 2017.

(51) **Int. Cl.**
A01G 17/12 (2006.01)

(52) **U.S. Cl.**
CPC **A01G 17/12** (2013.01)

(58) **Field of Classification Search**
CPC A01G 17/04; A01G 17/10; A01G 17/12; A01G 9/12

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,520,590 A * 6/1985 Schuh A01G 17/04 47/43
5,199,214 A * 4/1993 Caldwell A01G 17/04 135/118
5,363,591 A * 11/1994 Jones A47G 33/12 248/524
5,454,188 A * 10/1995 Sofy A47G 33/12 248/523
8,336,252 B1 * 12/2012 Ammons A01G 23/04 47/42
2017/0164566 A1 * 6/2017 Stablum A01G 9/02

* cited by examiner

Primary Examiner — Magdalena Topolski


Assistant Examiner — Arfan Y. Sinaki



(74) *Attorney, Agent, or Firm* — Nancy J. Flint, Attorney at Law, P.A.; Nancy J. Flint, Esq.

(57) **ABSTRACT**

A tree anchoring apparatus, a tree anchoring kit and a method of anchoring of a tree on a roof deck is provided consisting of three tree cabling systems attached to a tree. Each tree cabling system can exist in one of two states, depending on whether there is slack in the system or whether there is resistance due to movement of the tree from a vertical position to a horizontal position. In a wind event that causes the tree to move from a vertical position to a horizontal position, one or more of the tree cabling systems will experience resistance that keeps the tree in a horizontal position. When the wind event is over, the tree can be returned to a vertical position.

10 Claims, 6 Drawing Sheets

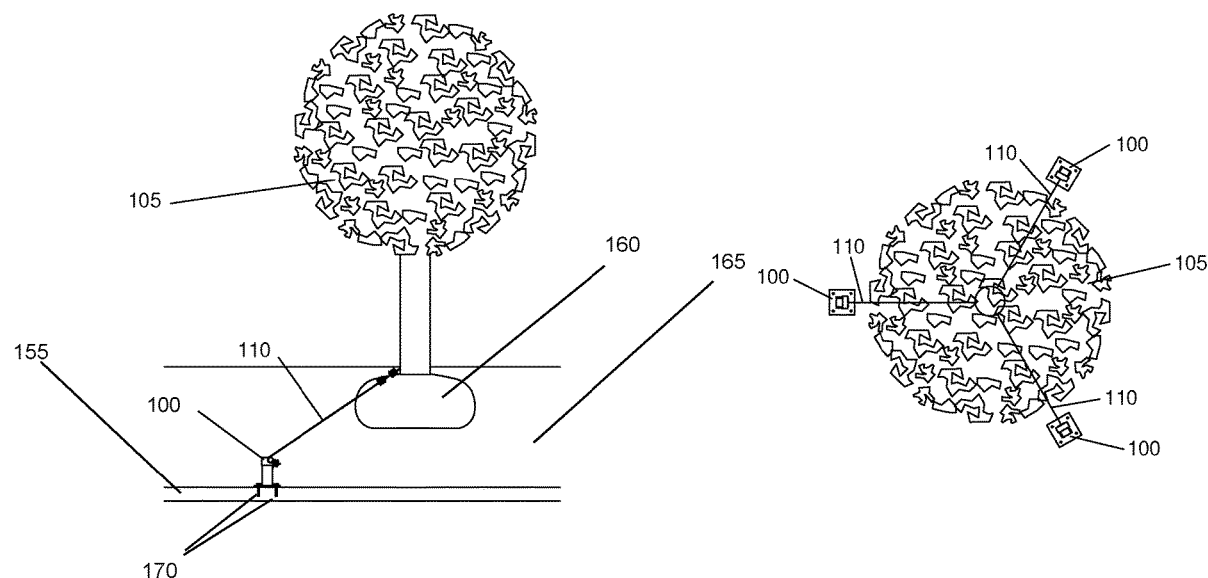

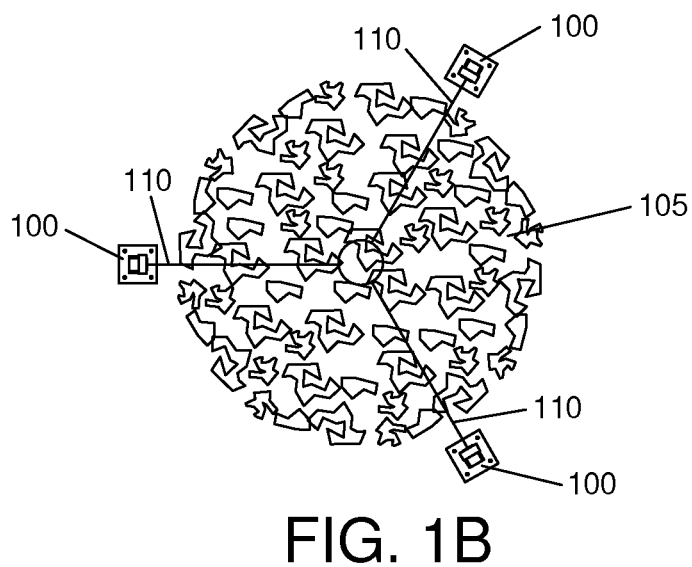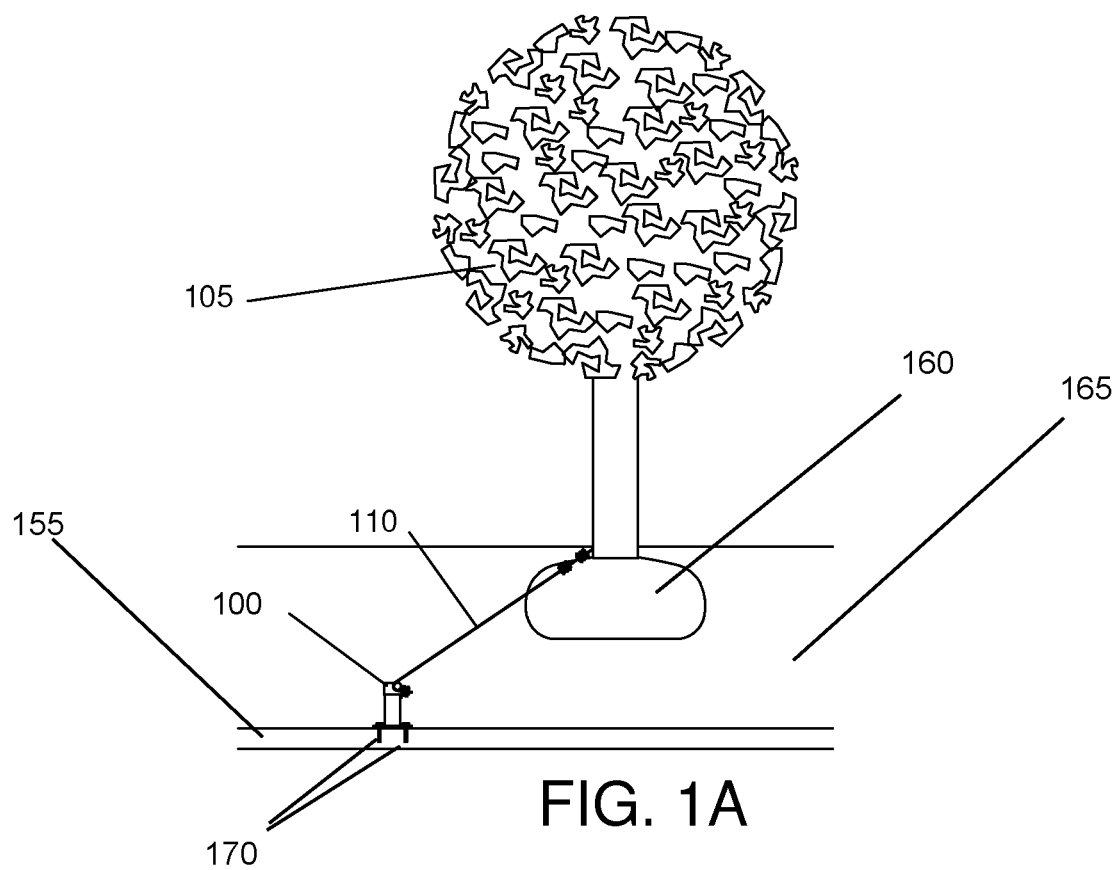

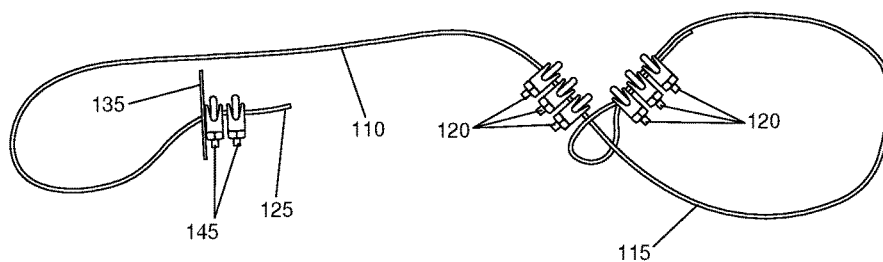


FIG. 1C

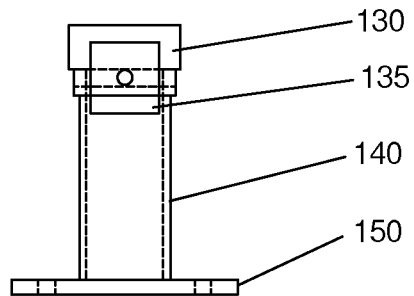


FIG. 1D

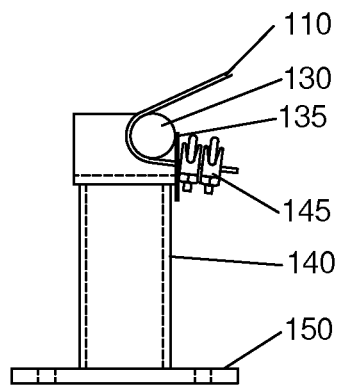


FIG. 1E

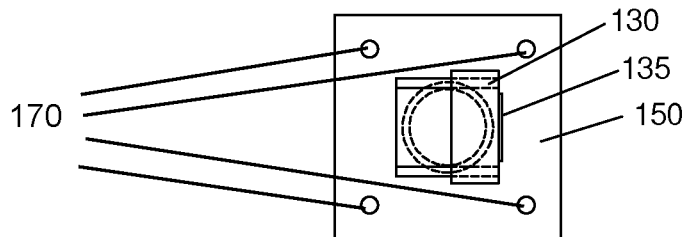
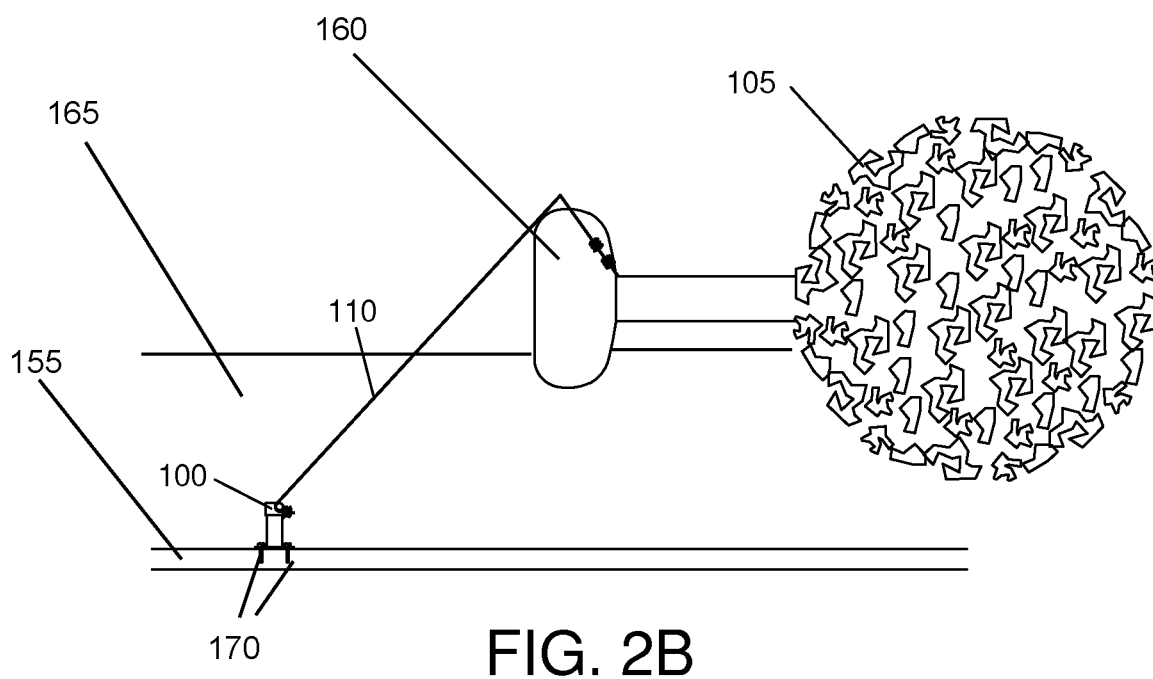
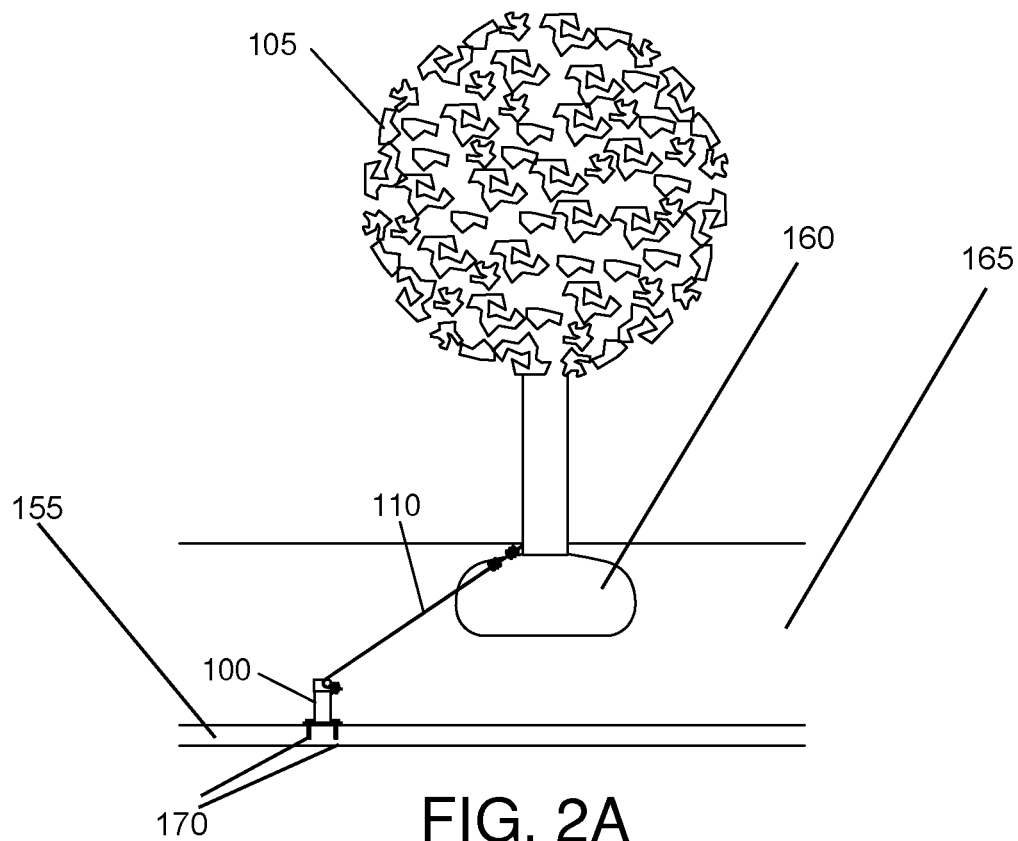


FIG. 1F



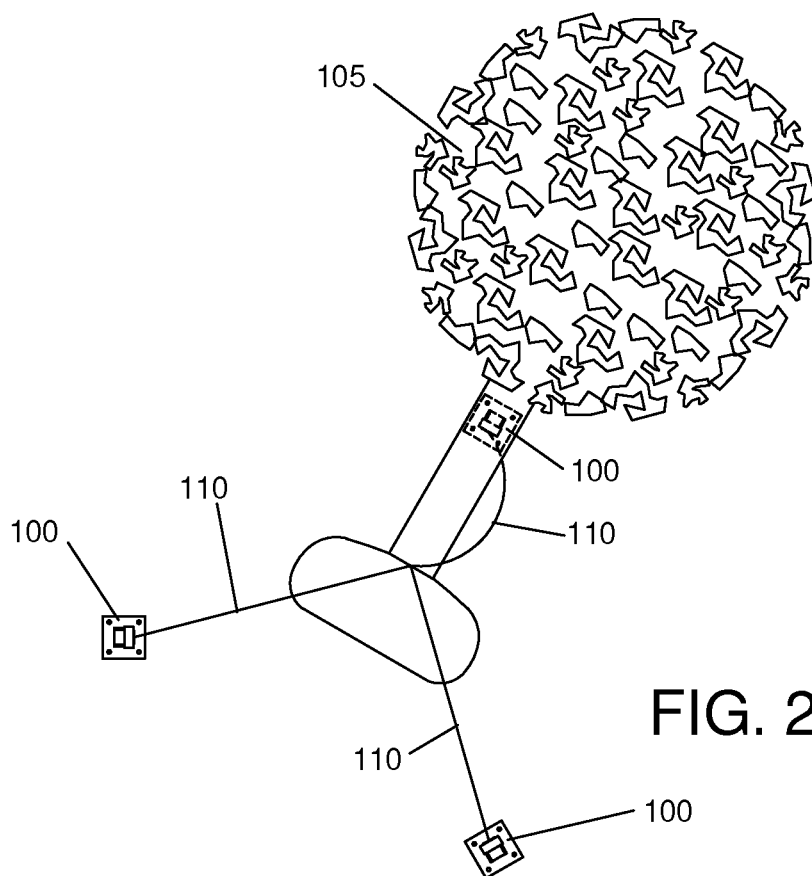


FIG. 2C

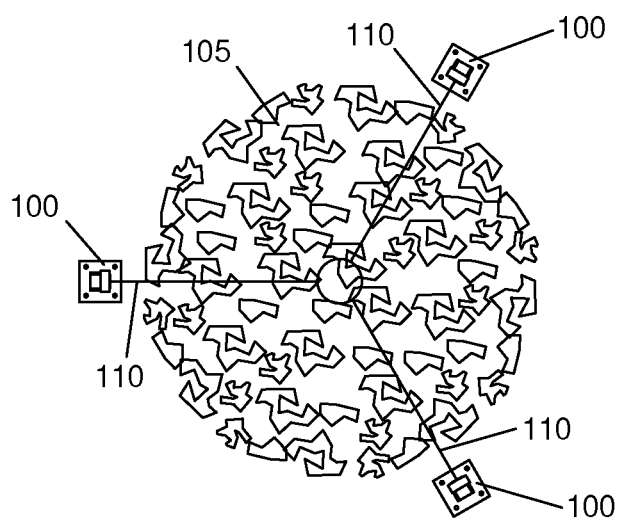


FIG. 2D

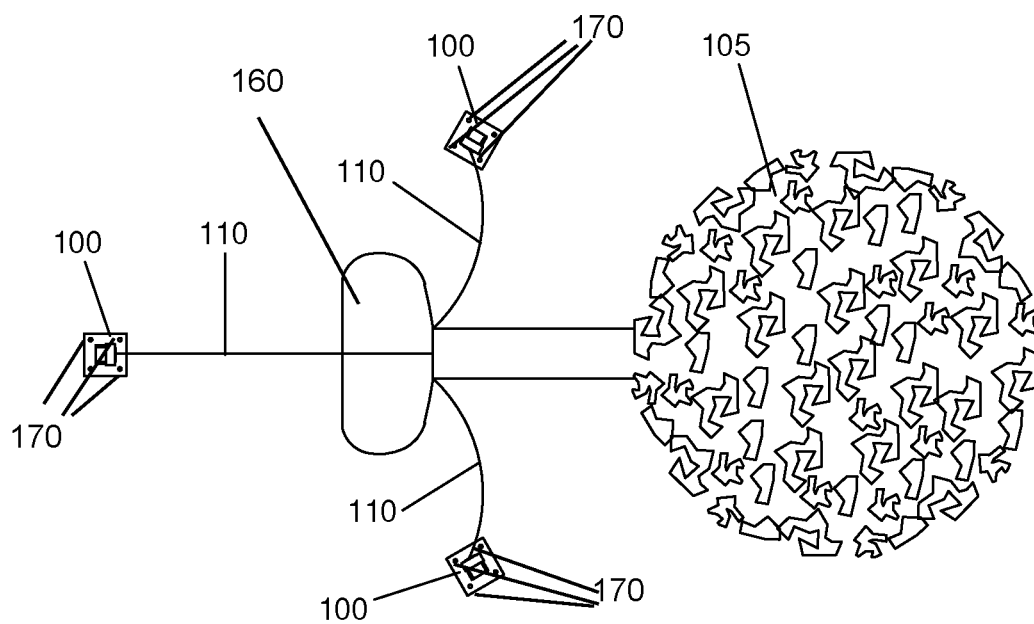


FIG. 2E

1

TREE CABLING SYSTEM FOR ROOF DECKS

FIELD OF THE INVENTION

The invention relates to a tree anchoring apparatus, a tree anchoring kit and a method of anchoring of a tree on a roof deck. According to the invention, three tree cabling systems are attached to a tree. Each tree cabling system can exist in one of two states, depending on whether there is slack in the system or whether there is resistance due to movement of the tree from a vertical position to a horizontal position. In a wind event that causes the tree to move from a vertical position to a horizontal position, one or more of the tree cabling systems will experience resistance that keeps the tree in a horizontal position. When the wind event is over, the tree can be returned to a vertical position.

BACKGROUND OF THE INVENTION

Tall structures have been in existence for centuries. The Great Pyramid of Giza, built in the 26th Century BC, was as high as 480 feet high. The Towers of Bologna, constructed in the 12th Century AD, topped out at about 320 feet for the tallest tower. Although these were tall structures, they did not perform the same functions that today's modern high-rise does. The purpose of the modern high-rise building is to maximize building area in the smallest lot area.

In high-rise buildings, residents desire to have a green common space available within the building. One available space that is often used as a green common space is the roof deck, or terrace. Elevated green common spaces can provide outdoor leisure and nice views for those who live in the high-rise building. Roof decks can be outfitted with swimming pools, grilling stations, dog runs, flat-screen televisions and landscaped walking paths.

Roof decks experience issues unique to their location. For example, atop a high-rise building, the wind can be much stronger than at ground level which can lead to furnishings becoming projectiles.

Roof decks are commonly planted with flowering shrubs, large shrubs, small trees and other plants. One issue that arises with planting large trees is the safety issue of anchoring of the trees on the roof deck. This is due in large part because roof decks have shallow soil in which to locate the root ball of the tree. As such the tree requires support in addition to that of the weight of the soil upon the root ball to prevent it from falling over, e.g. when subject to wind loading. The root ball cannot be anchored in a way that would penetrate the rooftop, since this comprises a water impermeable layer for protecting the inside of the building from water damage.

SUMMARY OF THE INVENTION

The Tree Cabling System (T.C.S.) of the invention provides resistance to prevent overturning of trees during a wind event additional to the resistance provided by the root system of trees planted on roof decks. When cable tension within the T.C.S. becomes high enough to cause slippage of clamps holding cables to the tree, the tree becomes horizontal. At that point, the moment which caused the overturning is greatly reduced and the T.C.S. holds the tree in place.

Three T.C.S.s (tree cabling systems) of the invention are used for each tree, each located approximately 120° apart from each other around the tree to be anchored. Each T.C.S.

2

comprises a wire rope which is fastened to the tree trunk at one end and an anchor at the other end. The anchor is fastened to the concrete roof deck. Each T.C.S. further comprises a second 2" diameter horizontal steel cylinder attached at a 90° angle to the top of the anchor. The wire rope is wrapped around the horizontal cylinder. The first end of the wire rope is fastened around the trunk of a tree and closed with a plurality of clamps. The second end of the wire rope passes through the horizontal cylinder attached to the top of each anchor and then through a washer where it is secured with one or more clamps.

The wire rope is connected with an amount of slack such that in a wind event the tree to which it is connected can move from a vertical position to a horizontal position. When the tree is in the horizontal position, the wire rope is held in position by the washer as it meets the horizontal cylinder. The wire rope can be sized to allow some slack in the line when the tree is in the horizontal position to allow for movement during the wind event.

Each T.C.S. can exist in a "primary" state and a "secondary" state. The primary state exists when the wire rope remains slack and is not pulled through the horizontal cylinder, and there is slack in the wire rope. The secondary state exists when the wire rope experiences tension and is pulled through the horizontal cylinder such that the washer meets with the end of the horizontal cylinder.

The T.C.S.s continue to hold the tree when it lies in its horizontal position, as the wire rope surrounding the tree trunk tightens when the wire rope becomes taught. Some slack in the wire rope remains allowing minor movements of the tree during minor wind events. This slack in the wire rope also allows dirt packed around the roots of the tree to resist some force as it would if planted at ground level. As the tree grows, the wire rope can be adjusted for a larger circumference.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is an elevation view of three T.C.S.s all in a primary state.

FIG. 1B is a plan view of FIG. 1A.

FIG. 1C depicts the wire rope used in each T.C.S.

FIG. 1D is an end view of the vertical cylinder, base and horizontal cylinder.

FIG. 1E is a front view of the vertical cylinder, base and horizontal cylinder.

FIG. 1F is a top view of the vertical cylinder, base and horizontal cylinder.

FIG. 2A is an elevation view of a first condition with three T.C.S.s all in a primary state, supporting a tree in its vertical position.

FIG. 2B is an elevation view of a second condition with two T.C.S.s in a primary state and a third T.C.S. in a secondary state.

FIG. 2C is a top view of a third condition with one T.C.S. in a primary state and two T.C.S.s in a secondary state.

FIG. 2D is a top view of FIG. 2A.

FIG. 2E is a top view of FIG. 2B.

DETAILED DESCRIPTION OF THE INVENTION

The root system of trees planted on a roof deck provide wind resistance similar to a tree planted at ground level. The Tree Cabling System (T.C.S.) of the invention provides additional resistance to prevent overturning of trees planted on roof decks during a wind event. The T.C.S. accounts for

3

a steady directional wind that applies overturning pressure on the tree. When cable tension within the T.C.S. becomes high enough to cause slippage of clamps holding cables to the tree, the tree becomes horizontal. At that point, the moment which caused the overturning is greatly reduced and the T.C.S. holds the tree in place.

Three T.C.S.s (tree cabling systems) of the invention are used for each tree, each located approximately 120° apart from each other around the tree to be anchored. Each T.C.S. comprises a wire rope which is fastened to the tree trunk at one end and an anchor at the other end. The anchor is fastened to the concrete roof deck, for example with 4 threaded rods secured by epoxy. The anchor comprises a vertical 4" diameter steel cylinder welded to a base. The surface of the vertical cylinder can be weather proofed with flashing. Each T.C.S. further comprises a second 2" diameter horizontal steel cylinder attached to the top of the vertical cylinder at a 90° angle to the vertical cylinder. The wire rope is wrapped around the horizontal cylinder. The first end of the wire rope is fastened around the trunk of a tree and closed with a plurality of clamps. The second end of the wire rope passes through the horizontal cylinder attached to the top of each vertical cylinder and then through a washer where it is secured with one or more clamps.

The wire rope is connected with an amount of slack such that in a wind event the tree to which it is connected can move from a vertical position to a horizontal position. When the tree is in the horizontal position, the wire rope is held in position by the washer as it meets the horizontal cylinder. The wire rope can be sized to allow some slack in the line when the tree is in the horizontal position to allow for movement during the wind event.

Each T.C.S. can exist in a "primary" state and a "secondary" state. The primary state exists when the wire rope remains slack and is not pulled through the horizontal cylinder, and there is slack in the wire rope. The secondary state exists when the wire rope experiences tension and is pulled through the horizontal cylinder such that the washer meets with the end of the horizontal cylinder.

Three conditions are contemplated by the T.C.S. The first condition exists when the tree is in its vertical position. Each T.C.S. remains in its "primary" state.

The second and third conditions exist when the tree is in its horizontal state. In the second condition, direction of the wind is concentrated on one wire rope. That wire rope passes through the horizontal cylinder allowing the tree to descend to a horizontal position. The other 2 T.C.S.s remain in the primary state.

In the third condition, direction of the wind is concentrated on two wire ropes. The wire ropes pass through the horizontal cylinders allowing the tree to descend to a horizontal position. The other T.C.S. remains in the primary state.

Whether one or two cables exist in a secondary state, at least one T.C.S. remains in the primary state.

The T.C.S.s continue to hold the tree when it lies in its horizontal position, as the wire rope surrounding the tree trunk tightens when the wire rope becomes taught. Some slack in the wire rope remains allowing minor movements of the tree during minor wind events. This slack in the wire rope also allows dirt packed around the roots of the tree to resist some force as it would if planted at ground level. As the tree grows, the wire rope can be adjusted for a larger circumference.

FIGS. 1A-1F depict the various components of the tree cabling system.

4

FIG. 1A is an elevation view of an exemplary T.C.S. 100 installed on a roof deck 155 typically made of poured concrete supporting a tree 105 and shown in a primary state having a root ball 160 located in soil 165. FIG. 1B is a plan view of FIG. 1A showing three T.C.S.s 100 supporting tree 105. As can be seen, three T.C.S.s 100 are used to support each tree 105, each T.C.S. 100 situated approximately 120° apart from each other.

FIG. 1C depicts wire rope 110 used in connection with each T.C.S. 100. One end 115 of each wire rope 110 is looped to form a noose which is secured by a plurality of clamps 120. End 115 of each wire rope 110 passes around the trunk of tree 105 to be supported. The other end 125 of each wire rope 110 passes through a horizontal cylinder 130 attached to the top of a vertical steel cylinder 140 which is anchored to a base 150 which is fastened to a roof deck 155 with 4 threaded rods 170. End 125 of wire rope 110 is attached around a washer 135 attached to horizontal cylinder 130 and is secured with a plurality of clamps 145, or end 125 may be welded to horizontal cylinder 130.

FIG. 1D is an end view of vertical cylinder 140, a base 150 and horizontal cylinder 130. FIG. 1E is a front view of vertical cylinder 140, base 150 and horizontal cylinder 130 showing wire rope 110 attached to horizontal cylinder 130. FIG. 1F is a top view of vertical cylinder 140, base 150 and horizontal cylinder 130.

FIG. 2A is an elevation view of a first condition with three T.C.S.s 100 all in a primary state, supporting a tree 105 in its vertical position. FIG. 2D is a top view of FIG. 2A.

FIG. 2B is an elevation view of a second condition with two T.C.S.s 100 in a primary state and a third T.C.S. 100 in a secondary state. FIG. 2E is a top view of FIG. 2B.

FIG. 2C is a top view of a third condition with one T.C.S. 100 in a primary state and two T.C.S.s 100 in a secondary state.

EXAMPLES

The following examples are exemplary only based on engineering calculations based on a basic wind speed of 175 mph with a 300 ft. high roof deck, with Exposure D and building risk category of II, Open. Wind pressures have been calculated according to ASCE 7-10 (set out by the National Council of Structural Engineers Associations) and FBC (Florida Building Code) 2014. Uplift pressure has been calculated for three operational zones of design pressure of 101 PSF (Zone 1); 170 PSF (Zone 2); and 236 PSF (Zone 3) and the following assumptions:

WIND CALCULATIONS
WIND PRESS CALCULATED FROM ASCE 7-10 AND FBC 2014
ROOF CHARACTERISTICS:

BASIC WIND SPEED	175 mph
EXPOSURE	D
BUILDING RISK CATEGORY	II, OPEN
HEIGHT	300 ft.
EDGE STRIP	(A) = VARIES
Kh:	1.73
Kd:	0.95
Kzt	1.0
VEL. PRESSURE Qh:	.00256
Kh Kzt Kd VEL. [squared]	129 PSF
GCp:	EXTERNAL COEFFICIENT
ZONE 1	-1.3
ZONE 2	2.2
ZONE 3	3.5
GCpi:	INTERNAL COEFFICIENT +0.0 -0.0
DESIGN PRESSURE:	$P = Q_h \times (GC_p - GC_{pi}) \times 0.6 W$

-continued

WIND CALCULATIONS WIND PRESS CALCULATED FROM ASCE 7-10 AND FBC 2014 ROOF CHARACTERISTICS:	
ZONE 1	$129 \times (-1.3) \times 0.6 = 101 \text{ PSF}$
ZONE 2	$129 \times (-2.2) \times 0.6 = 170 \text{ PSF}$
ZONE 3	$129 \times (-3.05) \times 0.6 = 236 \text{ PSF}$

Uplift Calculations Zone 1—Design Pressure 101 PSF
Area of 6 ft. diameter root ball=28.3 sq. ft.; 28.3 sq.
ft. \times 101 PSF=2858 lbs. uplift

Tree dead weight=28.3 sq. ft. \times 2 ft. \times 100 PCF.=5660 lbs.
Only 60% of tree dead weight can be used to resist uplift:
 $0.6 \times 5660 = 3396 \text{ LBS. } 3396 \text{ lbs.} > 2858 \text{ lbs. uplift}$

Uplift Calculations Zone 2—Design Pressure 170 PSF
Area of 6 ft. diameter root ball=28.3 sq. ft.; 28.3 sq.
ft. \times 170 PSF=4811 lbs. uplift

Tree dead weight=28.3 sq. ft. \times 2 ft. \times 100 PCF.=5660 LBS.
Only 60% of dead weight can be used to resist uplift.
 $0.6 \times 5660 = 3396 \text{ lbs. } 4811 \text{ lbs.} - 3396 \text{ lbs.} = 1415 \text{ lbs. deficit}$

Three cables are attached to tree to resist uplift; 1415
lbs./3=472 lbs. per cable.

Tension in cable:

Ft=tension in cable

Fv=vertical component of Ft=472 lbs;

Fh=horizontal component of ft. $\sin(\theta) = Fv/Ft$. $Ft = Fv / \sin(\theta)$; $\tan(\theta) = 3/4.5'$; $\theta = 34 \text{ degrees}$

Working strength of $\frac{1}{2}$ " cable=5320; breaking strength of
 $\frac{1}{2}$ " cable= $5 \times 5320 \text{ lbs.} = 26,600 \text{ lbs.}$

80% of working strength of $\frac{1}{2}$ " cable= 0.8×5320
lbs.=4256 lbs.

$Ft = Fv / \sin 34 \text{ degrees}$; $Ft = 472 / 0.56 = 843 \text{ lbs.} < 80\%$ of
working strength of a $\frac{1}{2}$ " cable

T.C.S. comprising three (3) $\frac{1}{2}$ " cables will resist uplift in
Zone 2, however lateral wind pressure will likely blow tree
down during a hurricane. Two cables can resist the wind
simultaneously, depending on the wind direction. While this
is occurring, the remaining cable will always be unstressed
(in compression).

The worst case scenario is a wind direction which con-
centrates on a single cable. See primary, secondary load
conditions. Lateral pressure will blow tree down when the
tension in a single cable exceeds 80% of the working
strength. This is 4256 lbs for $\frac{1}{2}$ " cable. When this happens
the clamps will slip allowing the tree to fall and the trunk to
parallel the cable. wind against the root ball will create
secondary tension in this cable. The other cable will be in
primary state.

Cable tension in Zone 1: 28.3 sq. ft. \times 101 PSF=2858 lbs.
A new angle is created between the anchor and the trunk
once the tree is horizontal. $\tan(\theta) = 6/5' - 9"$ (see FIGS.
2A-2B), $\theta = 46 \text{ degrees}$; $Ft = Fh / \cos 46$; $Ft = 2858 \text{ lbs.} /$
 $0.69 = 4142 \text{ lbs. } 4142 \text{ lbs.} < 4256 \text{ lbs.}$

Forces on anchor: there will be an uplift force and a
horizontal force, which will create a moment.

Uplift force: $Fv = Ft \times \sin 46$; $Fv = 4142 \text{ lbs.} \times 0.72 = 2982 \text{ lbs.}$
Moment: $Fh \times 1 \text{ ft.} = 2858 \text{ ft. lbs.}$

A person skilled in the art can determine how to anchor
the base and vertical cylinder to the roof deck to withstand
the forces placed on the T.C.S. according to a particular
configuration. As way of example only, and not meaning to
be bound to a particular embodiment, FIG. 3 depicts an
exemplary set of calculations on the installation of a suitable
base and vertical cylinder on a concrete base for use in

installation of the T.C.S. on a concrete roof deck. In this
embodiment, a 10 inch square metal base plate of 0.6 inch
thickness can be anchored to a 6 inch thick concrete base
using four (4) stainless steel bolts meeting ASTM F593 with
dimensions $\frac{5}{8} \times 4\frac{7}{10}$ using adhesive A7 available from Red-
Head® Concrete Anchoring Systems available from ITW
Construction Products of Canada. A 4 inch diameter Sched-
ule 40 steel vertical cylinder is welded to the anchored base.

What is claimed is:

1. A tree anchoring system comprising a plurality of tree
cabling systems fastened to a tree, wherein each tree cabling
system comprises:

a wire rope comprising a first end and a second end;
an anchor; and

a horizontal cylinder,

wherein the anchor is fastened to a concrete roof deck in
a vertical disposition,
wherein the horizontal cylinder is attached to a top of the
anchor at a 90° angle,

wherein the first end of the wire rope is movably fastened
to a trunk of a tree by encircling the tree trunk with the
first end of the wire rope and fastening the first end of
the wire rope to a portion of the wire rope more distal
from the tree trunk with a plurality of first clamps to
form a loop wherein the wire rope passes through the
loop;

wherein the second end of the wire rope is movably
attached to pass through the horizontal cylinder that is
attached to the anchor, wherein the wire rope passes
through a washer on the side of the horizontal cylinder
that is distal from the tree trunk, wherein a plurality of
second clamps are attached substantially to the second
end of the wire rope, wherein the plurality of second
clamps are sized larger than a central hole in the
washer,

wherein a plurality of third clamps are attached to the wire
rope in a section of the wire rope between the horizon-
tal cylinder and the second end of the wire rope and to
the second end of the wire rope,

wherein when the plurality of tree cabling systems are
disposed around a circumference of the tree such that
when the tree is in a vertical position, each wire rope
comprises slack at the second end of the wire rope that
is distal from the tree trunk and the horizontal cylinder,
wherein when the tree experiences a wind event and
bends from the vertical position such that it creates a
tension in any of the wire ropes, the second end of any
wire rope experiencing tension that is approximately
80% of its working strength passes through the third
plurality of clamps and the tension pulls the second end
of the wire rope through the horizontal cylinder until
the washer meets the end of the horizontal cylinder that
is distal from the tree trunk, whereupon the tree
descends to a horizontal position and each wire rope
remains attached to the trunk of the tree.

2. The tree anchoring system of claim 1, comprising three
tree cabling systems for the tree.

3. The tree anchoring system of claim 2, wherein each tree
cabling system is anchored to the concrete roof deck
approximately 120° apart from each other around the tree to
which the tree cabling system is attached.

4. The tree anchoring system of claim 2, wherein the
anchor is fastened to the concrete roof deck with 4 threaded
rods secured by epoxy.

5. The tree anchoring system of claim 4, wherein the
anchor comprises a vertical 4" diameter steel cylinder
welded to a base.

6. A method of anchoring a tree to a roof deck, comprising:

anchoring a tree to a deck with a plurality of the tree
cabling systems of claim 1,
wherein each tree cabling system comprises a primary 5
state and a secondary state,
wherein the primary state comprises a condition where
there is slack in the wire rope,
wherein the secondary state comprises a condition where
the wire rope experiences tension, 10
wherein each tree cabling system comprises the primary
state when the tree is in a vertical position,
wherein one or more but not all of the tree cabling system
comprise the secondary state when the tree is in a
horizontal position. 15

7. The method of claim 6, comprising three tree cabling
systems attached to the tree.

8. The method of claim 7, wherein each tree cabling
system is anchored to the roof deck approximately 120°
apart from each other around the tree to which the tree 20
cabling system is attached.

9. The method of claim 6, wherein the anchor is fastened
to the concrete roof deck with 4 threaded rods secured by
epoxy.

10. The method of claim 9, wherein the anchor comprises 25
a vertical 4" diameter steel cylinder welded to a base.

* * * * *